
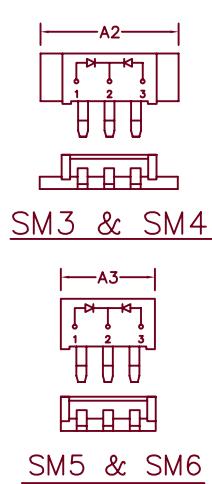


Ultrafast Recovery Modules

UFT70SM, 71SM & 72SM

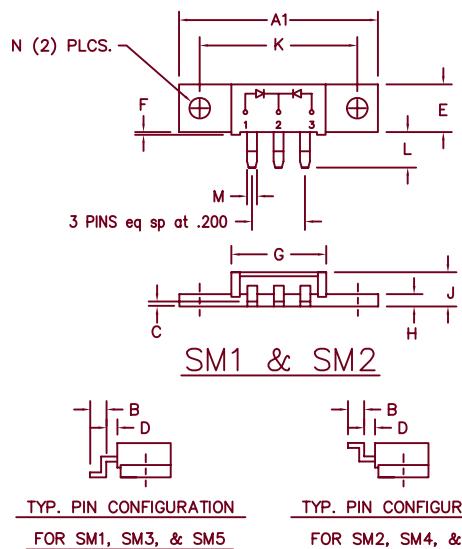

	Dim. Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A1	1.490	1.510	37.85	38.35	
A2	1.020	1.040	26.12	26.42	
A3	.695	.715	17.65	18.16	
B	.110	.120	2.79	3.04	
C	.027	.037	0.69	0.94	
D	.100	.110	2.54	2.79	
E	.350	.370	8.89	9.40	
F	.015	.025	0.38	0.64	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	1.180	1.195	29.97	30.35	
L	.230	.250	5.84	6.35	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	Dia.

Microsemi
Catalog Number

Working Reverse Voltage

Repetitive Peak Reverse Voltage

UFT7010SM ①②	100V	100V
UFT7015SM	150V	150V
UFT7020SM	200V	200V
UFT7120SM ①②	300V	300V
UFT7130SM	400V	400V
UFT7140SM	500V	500V
UFT7250SM ①②	600V	600V
UFT7260SM	700V	700V
UFT7270SM	800V	800V
UFT7280SM		

Note: ① Specify (1-6) to identify package desired

② Specify C—Common Cathode, A—Common Anode, D—Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 100 to 800 Volts
- Unique surface mount package
- 2 X 35 Amp current rating

Electrical Characteristics

	UFT70SM	UFT71SM	UFT72SM	
Average forward current per pkg	I _{F(AV)} 70A	I _{F(AV)} 70A	I _{F(AV)} 70A	Square Wave
Average forward current per leg	I _{F(AV)} 35A	I _{F(AV)} 35A	I _{F(AV)} 35A	Square Wave
Case Temperature	T _C 148°C	T _C 142°C	T _C 138°C	R _{θJC} = 1.0°C/W
Maximum surge current per leg	I _{FSM} 700A	I _{FSM} 600A	I _{FSM} 500A	8.3ms, half sine, T _J = 175°C
Max peak forward voltage per leg	V _{FM} .95V	V _{FM} 1.20V	V _{FM} 1.35V	I _{FM} = 35A: T _J = 25°C*
Max reverse recovery time per leg	t _{rr} 50ns	t _{rr} 60ns	t _{rr} 75ns	1/2A, 1A, 1/4A, T _J = 25°C
Max peak reverse current per leg	I _{RM} 3.0mA	I _{RM} 25μA	I _{RM} 115pF	V _{RRM} , T _J = 125°C
Max peak reverse current per leg	I _{RM} 25μA	I _{RM} 115pF	I _{RM} 3.0mA	V _{RRM} , T _J = 25°C
Typical Junction capacitance	C _J 300pF	C _J 120pF	C _J 115pF	V _R = 10V, T _J = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance per leg	R _{θJC}	1.0°C/W Junction to case
Max thermal resistance per pkg	R _{θJC}	0.5°C/W Junction to case
Typical thermal resistance (greased)	R _{θCS}	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight	SM1-2 SM3-4 SM5-6	0.3 ounce (8.4 grams) typical 0.24 ounce (6.7 grams) typical 0.18 ounce (5.2 grams) typical

UFT70SM1 — SM6

Figure 1
Typical Forward Characteristics — Per Leg

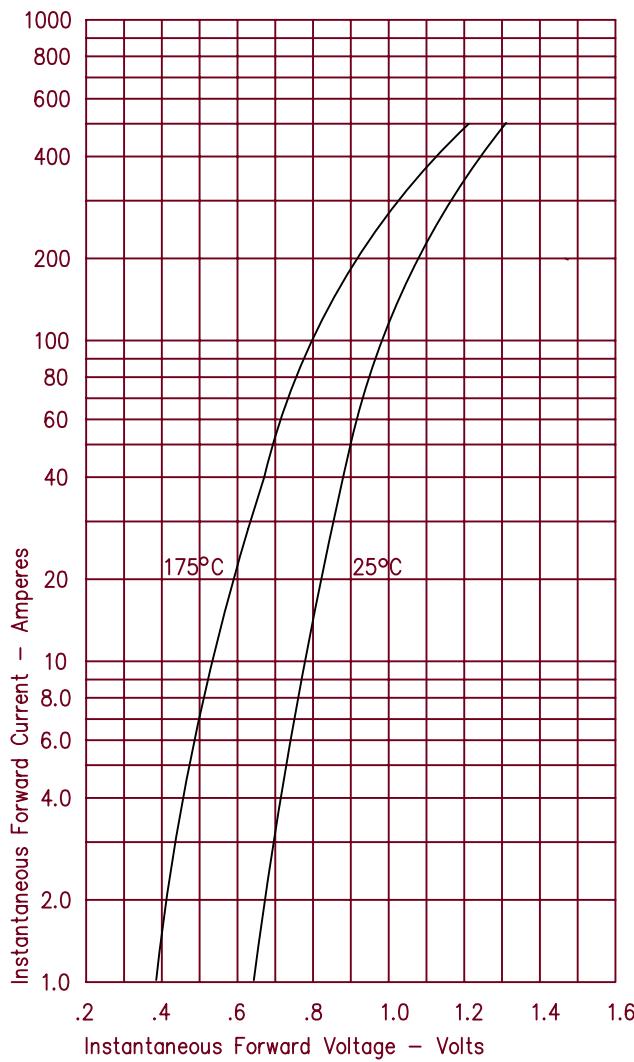


Figure 2
Typical Reverse Characteristics — Per Leg

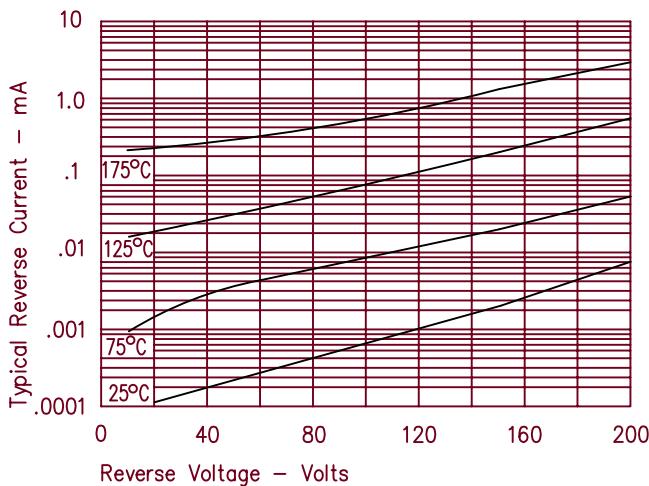


Figure 3
Typical Junction Capacitance — Per Leg

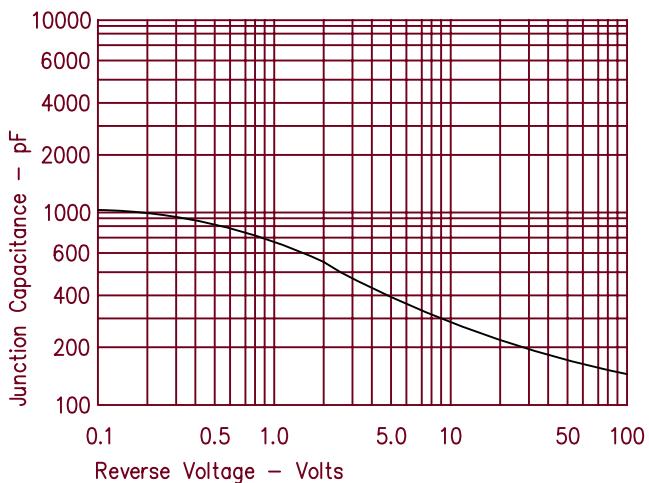


Figure 4
Forward Current Derating — Per Leg


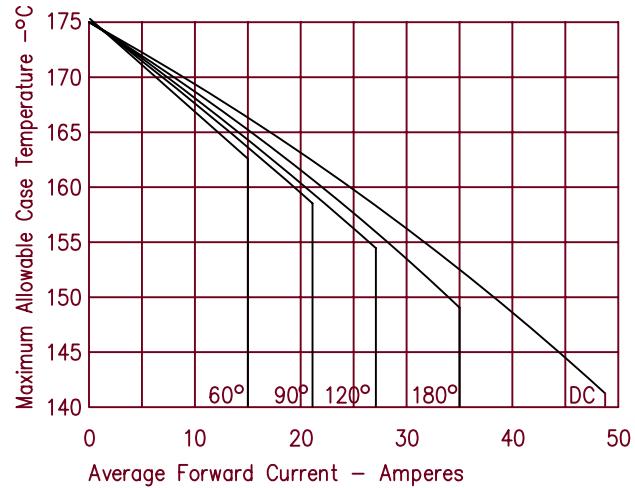


Figure 5
Maximum Forward Power Dissipation — Per Leg

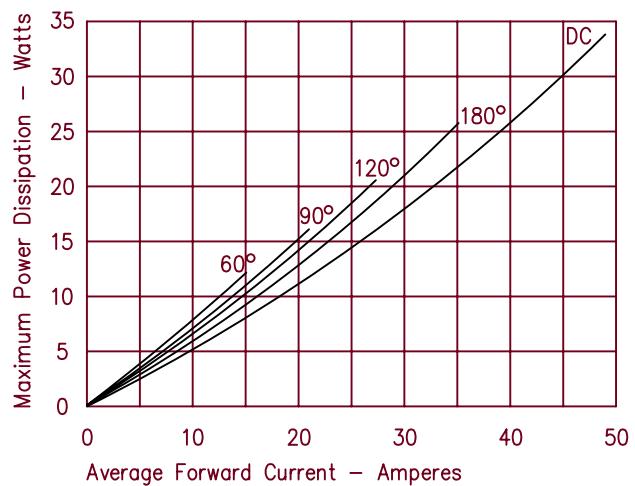

UFT71SM1 – SM6

Figure 1
Typical Forward Characteristics – Per Leg

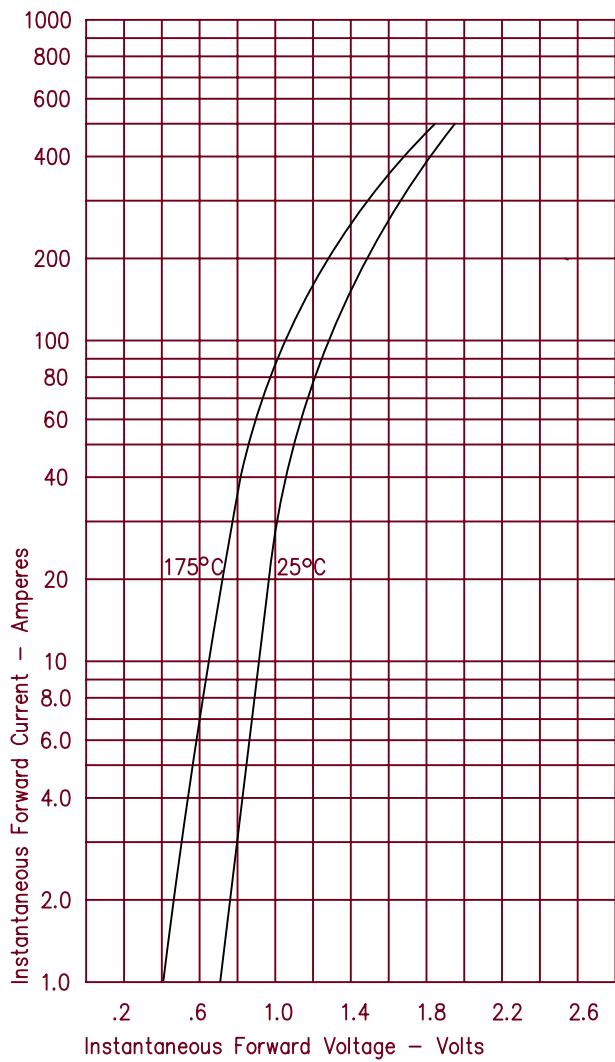


Figure 2
Typical Reverse Characteristics – Per Leg

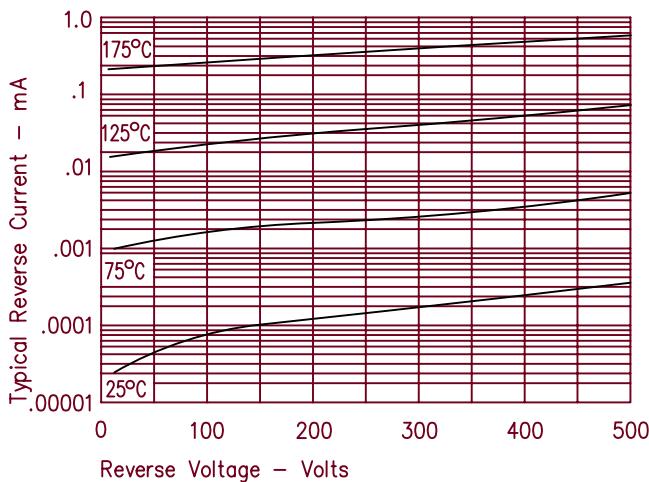


Figure 3
Typical Junction Capacitance – Per Leg

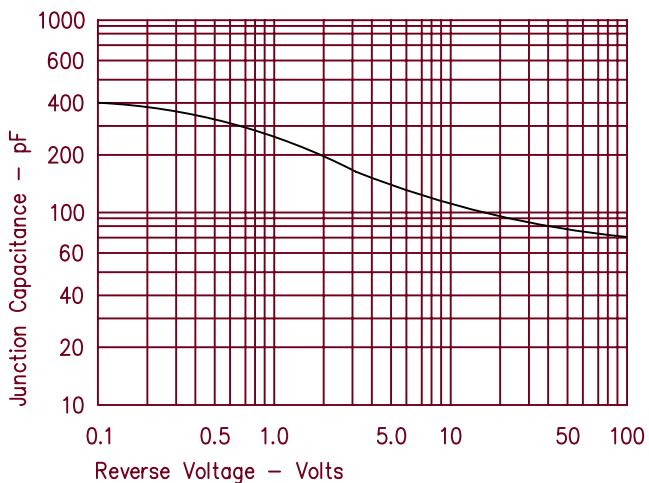


Figure 4
Forward Current Derating – Per Leg


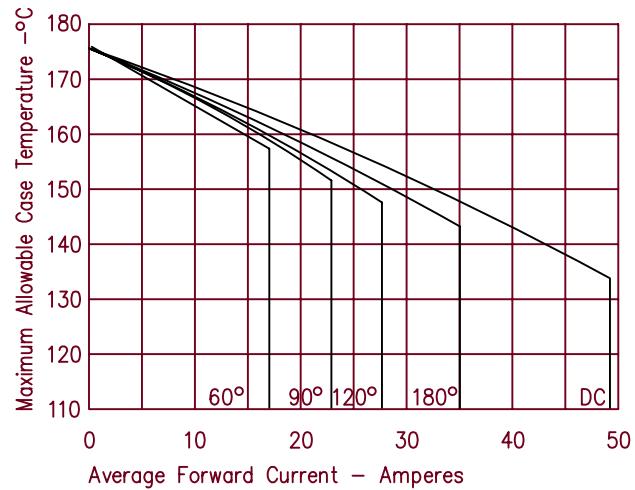


Figure 5
Maximum Forward Power Dissipation – Per Leg

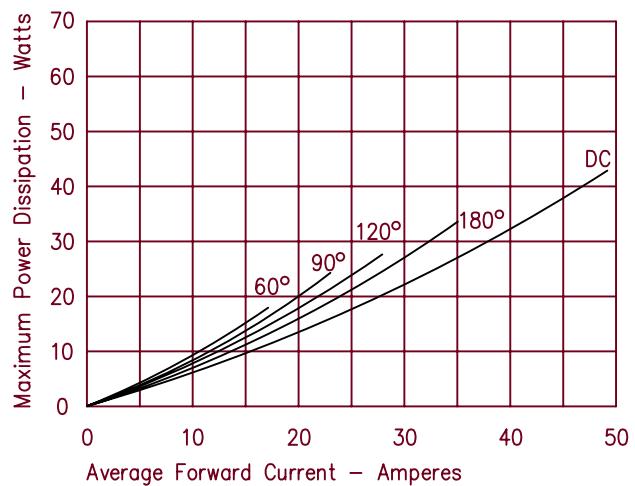

UFT72SM1 — SM6

Figure 1
Typical Forward Characteristics — Per Leg

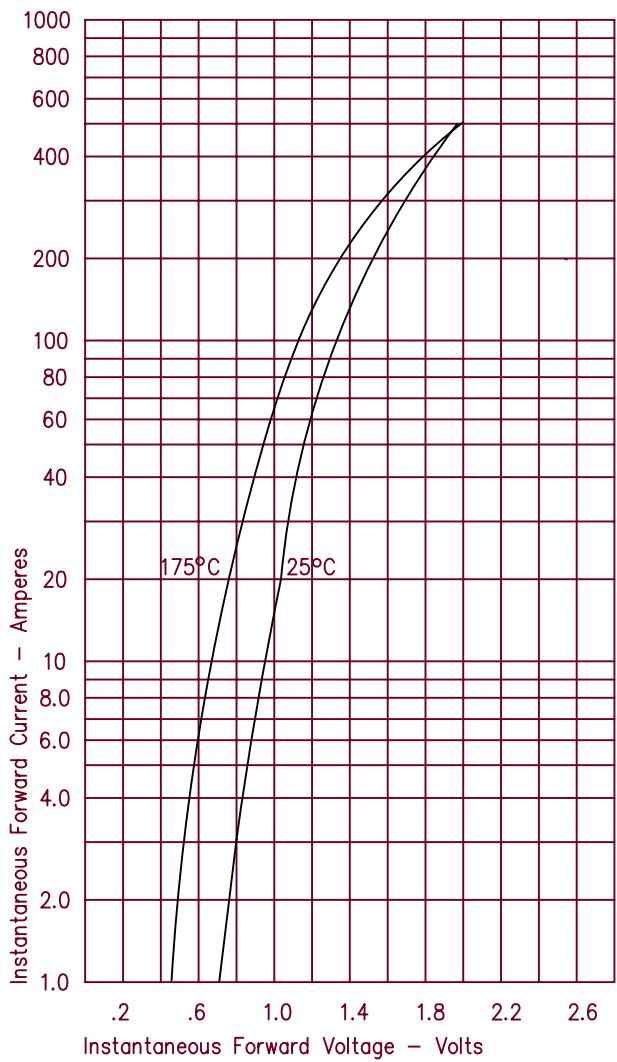


Figure 2
Typical Reverse Characteristics — Per Leg

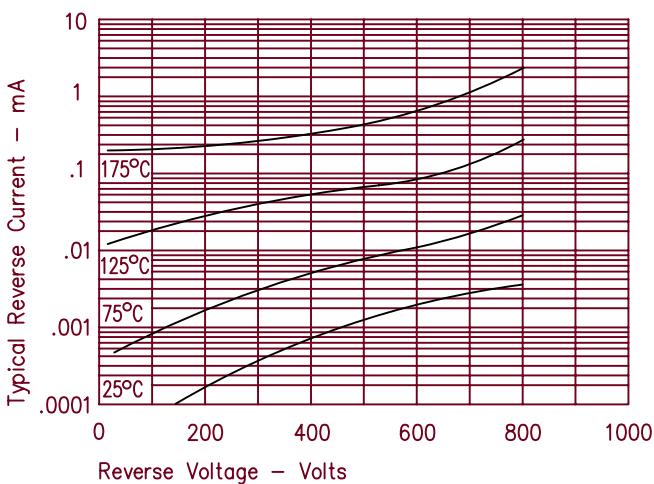


Figure 3
Typical Junction Capacitance — Per Leg

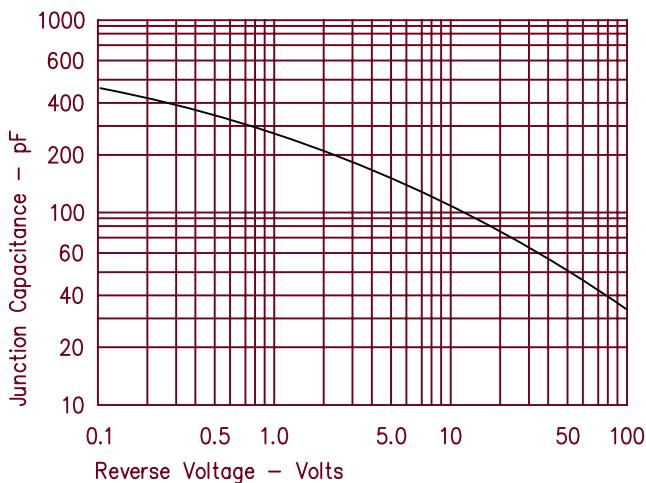


Figure 4
Forward Current Derating — Per Leg

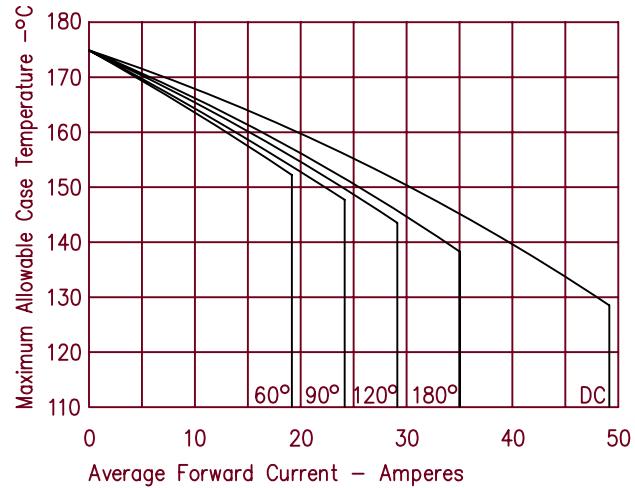


Figure 5
Maximum Forward Power Dissipation — Per Leg

