


# HiPerFET™ Power MOSFETs

**IXFH/IXFM 67 N10  
IXFH/IXFM 75 N10**

N-Channel Enhancement Mode  
High dv/dt, Low  $t_{rr}$ , HDMOS™ Family




Symbol	Test Conditions	Maximum Ratings		
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$	100		V
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GS} = 1 \text{ M}\Omega$	100		V
$V_{GS}$	Continuous	$\pm 20$		V
$V_{GSM}$	Transient	$\pm 30$		V
$I_{D25}$	$T_c = 25^\circ\text{C}$	67N10 75N10	67 75	A
$I_{DM}$	$T_c = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$	67N10 75N10	268 300	A
$I_{AR}$	$T_c = 25^\circ\text{C}$	67N10 75N10	67 75	A
$E_{AR}$	$T_c = 25^\circ\text{C}$	30		mJ
$dv/dt$	$I_s \leq I_{DM}$ , $di/dt \leq 100 \text{ A}/\mu\text{s}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$ , $R_G = 2 \Omega$	5		V/ns
$P_D$	$T_c = 25^\circ\text{C}$	300		W
$T_J$		-55 ... +150		$^\circ\text{C}$
$T_{JM}$		150		$^\circ\text{C}$
$T_{stg}$		-55 ... +150		$^\circ\text{C}$
$T_L$	1.6 mm (0.062 in.) from case for 10 s	300		$^\circ\text{C}$
$M_d$	Mounting torque	1.13/10	Nm/lb.in.	
Weight		TO-204 = 18 g, TO-247 = 6 g		

Symbol	Test Conditions	Characteristic Values			
		( $T_J = 25^\circ\text{C}$ , unless otherwise specified)	min.	typ.	max.
$V_{DSS}$	$V_{GS} = 0 \text{ V}$ , $I_D = 250 \mu\text{A}$	100			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = 4 \text{ mA}$	2.0		4	V
$I_{GSS}$	$V_{GS} = \pm 20 \text{ V}_{DC}$ , $V_{DS} = 0$			$\pm 100$	nA
$I_{DSS}$	$V_{DS} = 0.8 \cdot V_{DSS}$ $V_{GS} = 0 \text{ V}$	$T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$		250 1	$\mu\text{A}$ mA
$R_{DS(on)}$	$V_{GS} = 10 \text{ V}$ , $I_D = 0.5 I_{D25}$	67N10 75N10 Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2 \%$		0.025 0.020	$\Omega$


$V_{DSS}$	$I_{D25}$	$R_{DS(on)}$
100 V	67 A	25 mΩ
100 V	75 A	20 mΩ

$t_{rr} \leq 200 \text{ ns}$

TO-247 AD (IXFH)



TO-204 AE (IXFM)



G = Gate,  
S = Source,  
TAB = Drain

## Features

- International standard packages
- Low  $R_{DS(on)}$  HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect
- Fast intrinsic Rectifier

## Applications

- DC-DC converters
- Synchronous rectification
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control
- Temperature and lighting controls
- Low voltage relays


## Advantages

- Easy to mount with 1 screw (TO-247) (isolated mounting screw hole)
- Space savings
- High power density


Symbol	Test Conditions	Characteristic Values			
		( $T_j = 25^\circ\text{C}$ , unless otherwise specified)	min.	typ.	max.
$g_{fs}$	$V_{DS} = 10 \text{ V}; I_D = I_{D25}$ , pulse test	25	30	S	
$C_{iss}$ $C_{oss}$ $C_{rss}$	$V_{GS} = 0 \text{ V}, V_{DS} = 25 \text{ V}, f = 1 \text{ MHz}$	4500		pF	
		1600		pF	
		800		pF	
$t_{d(on)}$ $t_r$ $t_{d(off)}$ $t_f$	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 I_{D25}$ $R_G = 2 \Omega$ , (External)	20	30	ns	
		60	110	ns	
		80	110	ns	
		60	90	ns	
$Q_{g(on)}$ $Q_{gs}$ $Q_{gd}$	$V_{GS} = 10 \text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 I_{D25}$	180	260	nC	
		36	70	nC	
		85	160	nC	
$R_{thJC}$			0.42	K/W	
$R_{thCK}$		0.25		K/W	

**Source-Drain Diode**

Symbol	Test Conditions	Characteristic Values			
		( $T_j = 25^\circ\text{C}$ , unless otherwise specified)	min.	typ.	max.
$I_s$	$V_{GS} = 0 \text{ V}$	67N10 75N10		67 75	A
$I_{SM}$	Repetitive; pulse width limited by $T_{JM}$	67N10 75N10		268 300	A
$V_{SD}$	$I_F = I_s, V_{GS} = 0 \text{ V}$ , Pulse test, $t \leq 300 \mu\text{s}$ , duty cycle $d \leq 2 \%$		1.75		V
$t_{rr}$	$I_F = 25 \text{ A}, -di/dt = 100 \text{ A}/\mu\text{s}$ , $T_j = 25^\circ\text{C}$ $V_R = 25 \text{ V}$ $T_j = 125^\circ\text{C}$		200 300		ns

**TO-247 AD (IXFH) Outline**


Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

**TO-204 AE (IXFM) Outline**


Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	38.61	39.12	1.520	1.540
B	-	22.22	-	0.875
C	6.40	11.40	0.252	0.449
D	1.45	1.60	0.057	0.063
E	1.52	3.43	0.060	0.135
F	30.15	BSC	1.187	BSC
G	10.67	11.17	0.420	0.440
H	5.21	5.71	0.205	0.225
J	16.64	17.14	0.655	0.675
K	11.18	12.19	0.440	0.480
Q	3.84	4.19	0.151	0.165
R	25.16	26.66	0.991	1.050

Fig. 1 Output Characteristics

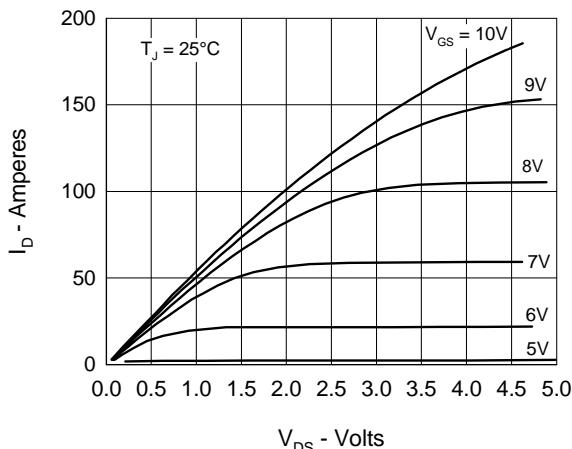


Fig. 2 Input Admittance

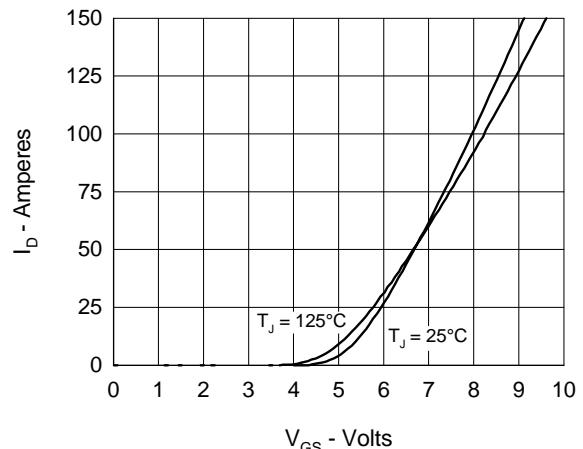


Fig. 3  $R_{DS(on)}$  vs. Drain Current

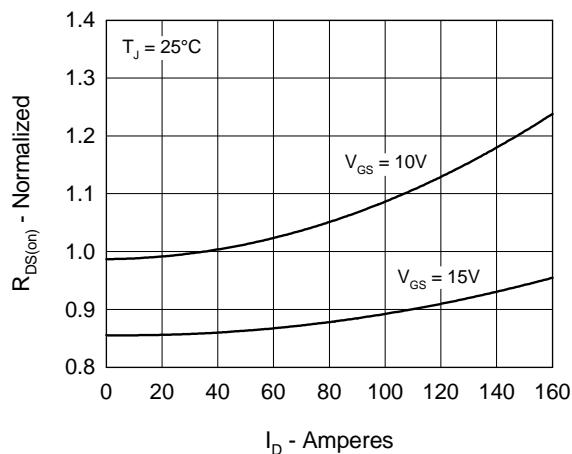


Fig. 4 Temperature Dependence of Drain to Source Resistance

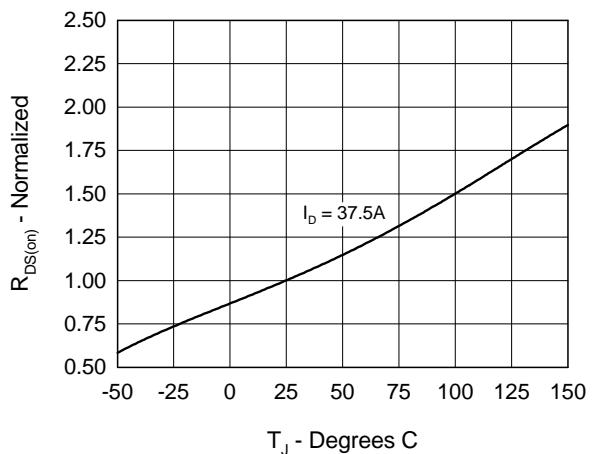


Fig. 5 Drain Current vs. Case Temperature

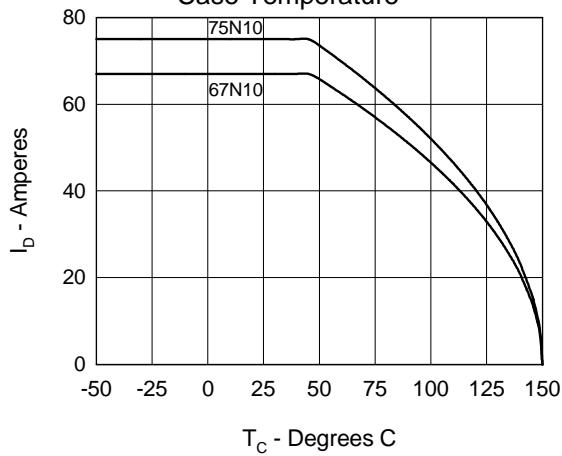


Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

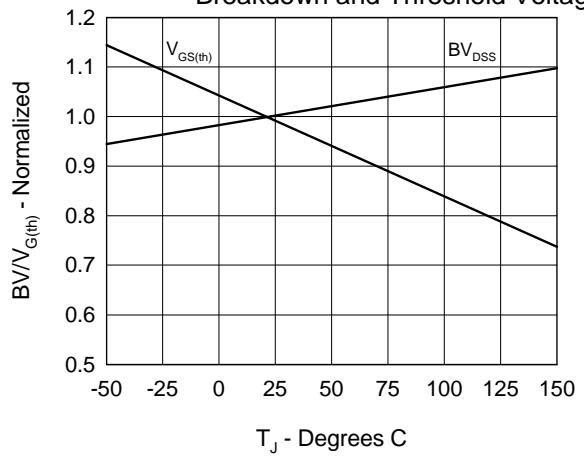


Fig.7 Gate Charge Characteristic Curve

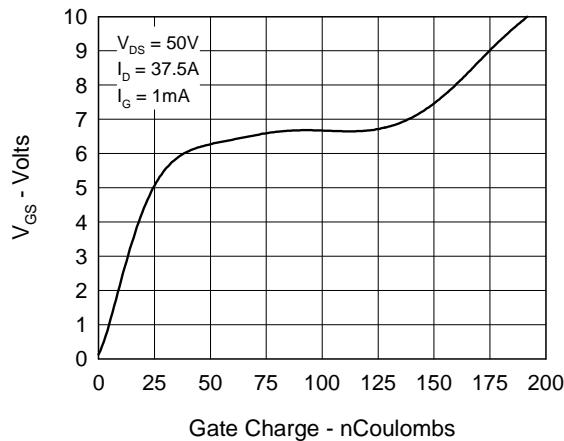


Fig.8 Forward Bias Safe Operating Area

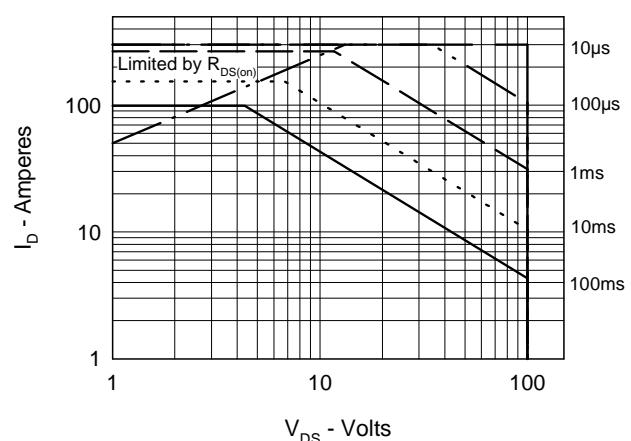


Fig.9 Capacitance Curves

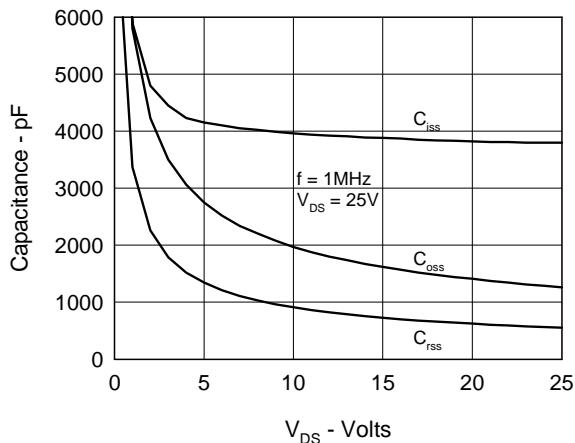


Fig.10 Source Current vs. Source to Drain Voltage

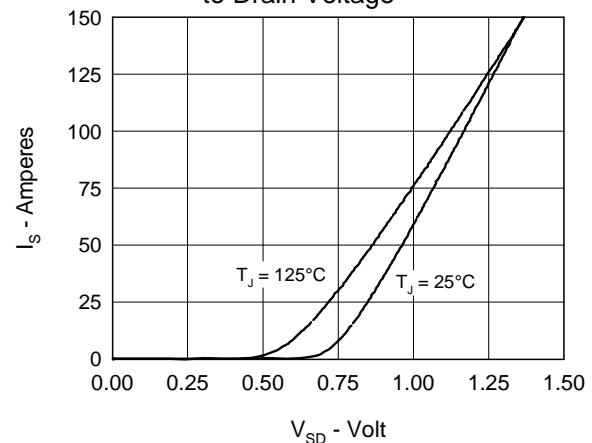


Fig.11 Transient Thermal Impedance

