

SMT POWER INDUCTORS

Power Beads - Volta 1 & 2 Series









-  **Height:** 3.2mm and 4.5mm Max
 -  **Footprint:** 7.0 x 6.4mm Max and 8.9 x 6.4mm Max
 -  **Current Rating:** up to 16A
 -  **Inductance Range:** 0.1 μ H to 0.6 μ H
 -  **Frequency Range:** up to 2MHz

Electrical Specifications @ 25°C — Operating Temperature -40°C to +130°C											
Part ^{5,6} Number	Inductance @Irated (nH ± 20%)	Irated ¹ (ADC)	DCR (mΩ)		Inductance @0ADC (nH ± 20%)	Saturation Current ² (ADC)		Heating ³ Current (A)	Trise ⁴ Factor K0	Core Loss Factor ⁴	
			TYP	MAX		25°C	100°C			K1	K2
VOLTA 1											
P1681	95	15	0.31	0.39	100	18	16.2	15	1.0032	.00319	.07381
PA0274	475*	6.0	1.60	1.8*	700	7	4.8	12	1.4000	.00638	.24632
VOLTA 2											
PA0229	92	16	0.68	0.80	100	36	30	16	2.2458	.00638	.03975
P2005	142.5	15	0.45	0.56	150	18	16.2	15	2.2458	.00638	.05961
P2004	190	15	0.45	0.56	200	16.8	15.1	15	2.2458	.00638	.07949
PA0277	600*	10.7	2.3	2.53*	700	12.6	8.0	10.7	2.0400	.01276	.13196


* DCR and Inductance rating for indicated parts is for both windings tied in series.

Mechanicals


Schematic

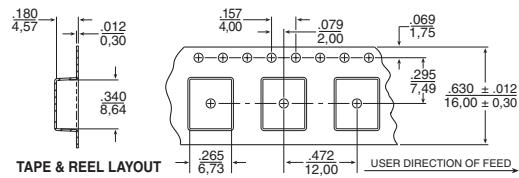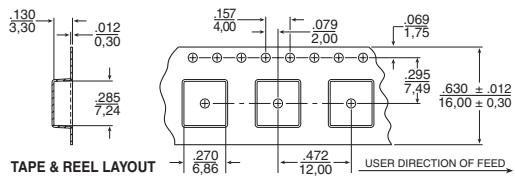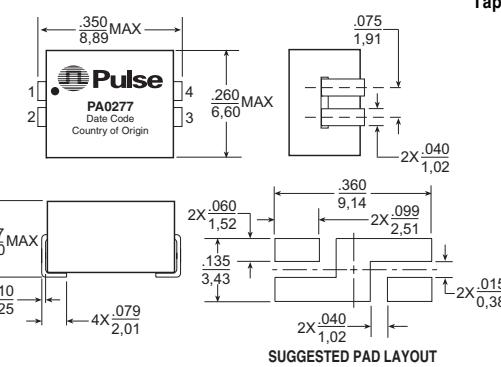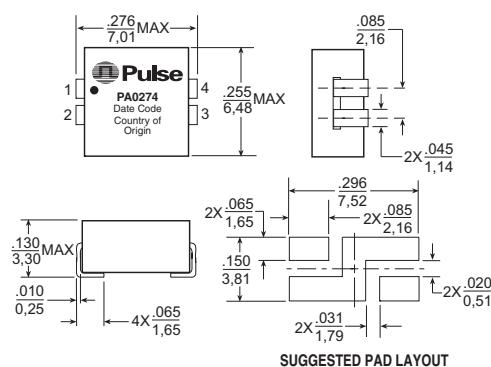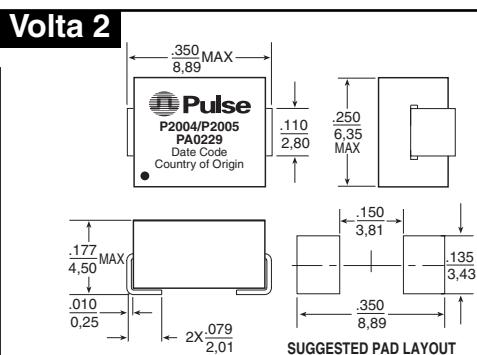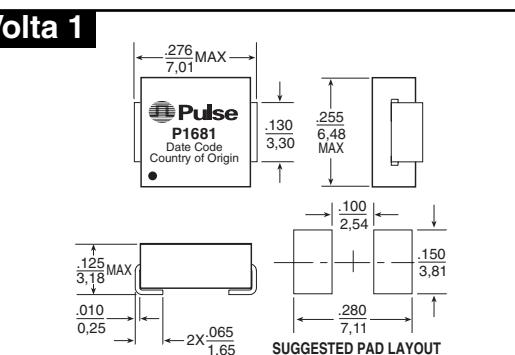

Volta 1 **Volta 2**



P1681
P2004
P2005
PA0329



PA0274
PA0277

Dimensions: Inches

mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{.025}$

SMT POWER INDUCTORS


Power Beads - Volta 1 & 2 Series



Notes from Tables



1. The rated current as listed is either the saturation current or the heating current depending on which value is lower.
2. The saturation current is the current which causes the inductance to drop by 10% at the stated ambient temperatures (-40°C, 25°C, 125°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
3. The heating current is the DC current which causes the temperature of the part to increase by approximately 30°C. This current is determined by mounting the component on a PCB with .25" wide, 3 oz. equivalent copper traces, and applying the current to the device for 30 minutes.
4. In high volt*time applications, additional heating in the component can occur due to core losses in the inductor which may necessitate derating the current in order to limit the temperature rise of the component. In order to determine the approximate total losses (or temperature rise) for a given application both copper losses and core losses should be taken into account.

**Inductance vs Current Characteristics
P1681, P2005, P2004**

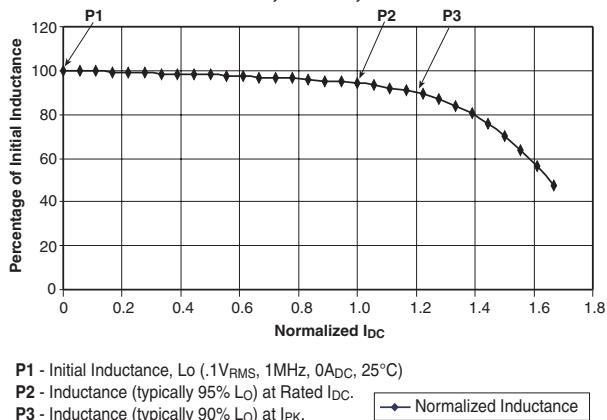


Normalized Inductance

PA0229 Inductance vs. DC Current at 25°C

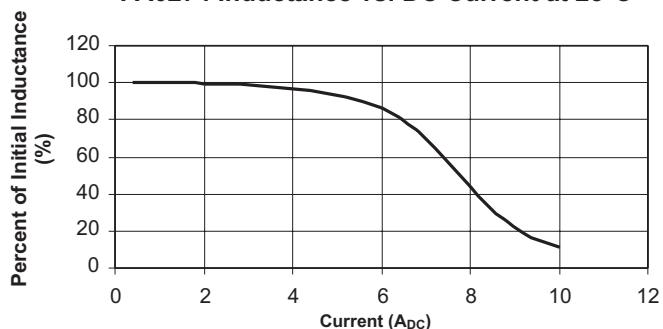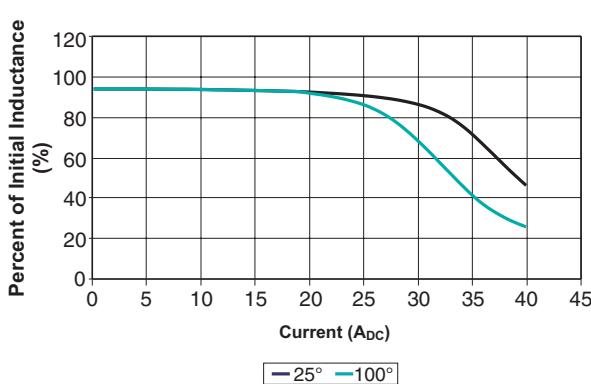

PA0277 Inductance vs. DC Current at 25°C

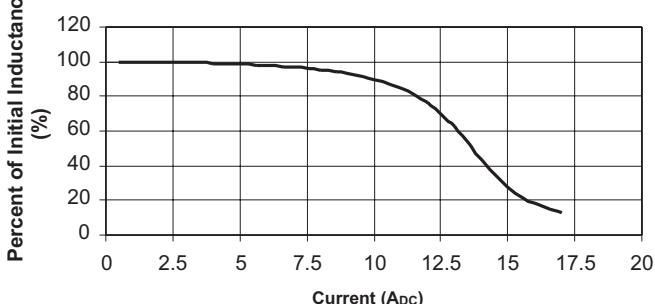

For More Information:

Pulse Worldwide Headquarters	Pulse Northern Europe	Pulse Southern Europe	Pulse China Headquarters	Pulse North China	Pulse South Asia	Pulse North Asia
12220 World Trade Drive San Diego, CA 92128 U.S.A. www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	3 Huxley Road Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	No. 1 Industrial District Changan, Dongguan China TEL: 86 769 5538070 FAX: 86 769 5538870	Room 1002 No. 819 Nanjing West Rd Shanghai China TEL: 86 21 32181071 FAX: 86 21 32181396	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 Hsin Tai Wu Road Hsi-Chih Taipei Hsien Taiwan TEL: 886 2 26980228 FAX: 886 2 26980948

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2005. Pulse Engineering, Inc. All rights reserved.