





ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER		TEST CONDITIONS	VALUE
D.C. RESISTANCE	1–6	@20°C	1.10 ohms ±10%
INDUCTANCE	1–6	10kHz, 100mVAC, Ls	1.20mH ±10%
SATURATION CURRENT		20% rolloff from initial	200mA



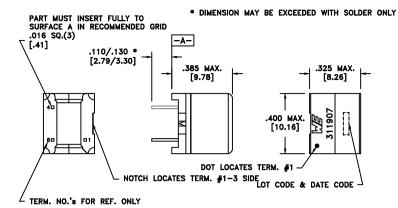



Wire insulation & RoHS status not affected by wire color. Wire insulation color may vary depending on availability.

	REV.	DATE	Packaging Specifications			
			Method: Tray			
			PKG-0525			
1			www.we-online.com/midcom	7		
1	64	11/10	SEE REVISION SHEET FOR REVISION LEVEL			

Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.001 [.03]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
TRANSFORMER

eiSos p/n: **750311907**

PART NO. 750311907

SPECIFICATION SHEET 1 OF 1