

# NPN SILICON POWER TRANSISTOR

- HIGH DC CURRENT GAIN
- LOW SATURATION VOLTAGE
- INSULATED PACKAGE FOR EASY MOUNTING


#### **APPLICATIONS**


- GENERAL PURPOSE POWER AMPLIFIERS
- GENERAL PURPOSE SWITCHING

#### **DESCRIPTION**

The 2SD2012 is a silicon NPN power transistor housed in TO-220F insulated package.

It is inteded for power linear and switching applications.

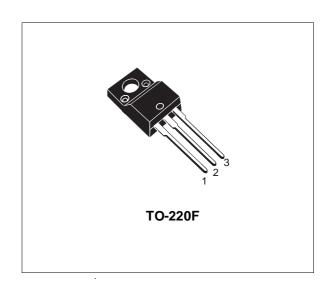

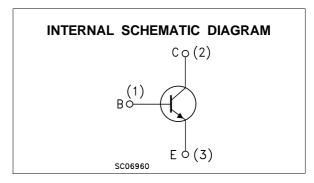

#### **ABSOLUTE MAXIMUM RATINGS**

| Symbol            | Parameter   | Value      | Unit |
|-------------------|---|------------|------|
| V <sub>CBO</sub>  | Collector-Base Voltage (I <sub>E</sub> = 0)                                 | 60         | V    |
| V <sub>CEO</sub>  | Collector-Emitter Voltage (I <sub>B</sub> = 0)                              | 60         | V    |
| V <sub>EBO</sub>  | Emitter-Base Voltage (I <sub>C</sub> = 0)                                   | 7          | V    |
| Ic                | Collector Current   | 3          | Α    |
| I <sub>CM</sub>   | Collector Peak Current (tp < 5 ms)  | 6          | А    |
| Ι <sub>Β</sub>    | Base Current  | 0.5        | Α    |
| P <sub>tot</sub>  | Total Dissipation at T <sub>c</sub> ≤ 25 °C                                 | 25         | W    |
| V <sub>isol</sub> | Insulation Withstand Voltage (RMS) from All Three Leads to Exernal Heatsink | 1500       | V    |
| T <sub>stg</sub>  | Storage Temperature   | -65 to 150 | °C   |
| Tj                | Max. Operating Junction Temperature   | 150        | O°   |

October 2003 1/5

#### THERMAL DATA


| R <sub>thj-case</sub> | Thermal Resistance Junction-case | Max | 5 | °C/W | 1 |
|-----------------------|----------------------------------|-----|---|------|---|
|-----------------------|----------------------------------|-----|---|------|---|

## **ELECTRICAL CHARACTERISTICS** (T<sub>case</sub> = 25 °C unless otherwise specified)


| Symbol                | Parameter  | Test Cond                                      | itions   | Min.      | Тур. | Max. | Unit |
|-----------------------|--|--|--|-----------|------|------|------|
| Ісво                  | Collector Cut-off<br>Current (I <sub>E</sub> = 0)              | V <sub>CB</sub> = 60 V                         |  |           |      | 100  | μΑ   |
| I <sub>EBO</sub>      | Emitter Cut-off Current (I <sub>C</sub> = 0)                   | $V_{EB} = 7 V$                                 |  |           |      | 100  | μΑ   |
| V <sub>(BR)CEO*</sub> | Collector-Emitter<br>Breakdown Voltage<br>(I <sub>B</sub> = 0) | I <sub>C</sub> = 50 mA                         |  | 60        |      |      | V    |
| V <sub>CE(sat)*</sub> | Collector-Emitter<br>Saturation Voltage                        | I <sub>C</sub> = 2 A                           | $I_B = 0.2 A$                                  |           | 0.4  | 1    | V    |
| $V_{BE}*$             | Base-Emitter Voltage   | $I_C = 0.5 A$                                  | $V_{CE} = 5 V$                                 |           | 0.75 | 1    | ٧    |
| h <sub>FE</sub> *     | DC Current Gain  | I <sub>C</sub> = 0.5 A<br>I <sub>C</sub> = 2 A | V <sub>CE</sub> = 5 V<br>V <sub>CE</sub> = 5 V | 100<br>20 |      | 320  |      |
| f <sub>T</sub>        | Transition frequency   | V <sub>CE</sub> = 5 V                          | I <sub>C</sub> = 0.5 A                         |           | 3    |      | MHz  |
| ССВО                  | Collector-Base<br>Capacitance                                  | V <sub>CB</sub> = 10 V I <sub>E</sub> = 0      | f = 1 MHz                                      |           | 35   |      | pF   |

<sup>\*</sup> Pulsed: Pulse duration = 300 μs, duty cycle ≤ 2 %

### Safe Operating Area

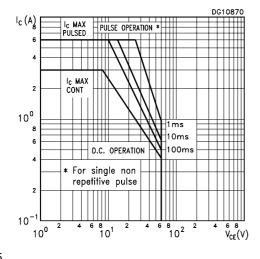


### **Derating Curve**

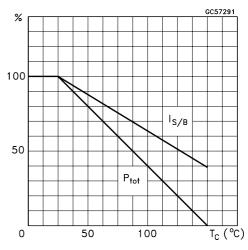


47/


### DC Current Gain

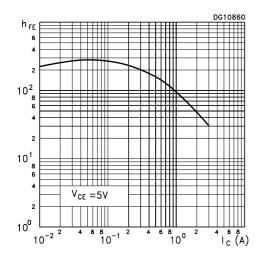

## Collector Emitter Saturation Voltage

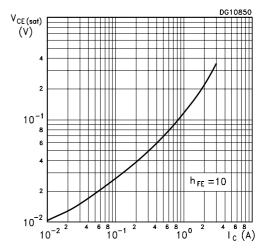


### Base Emitter On Voltage

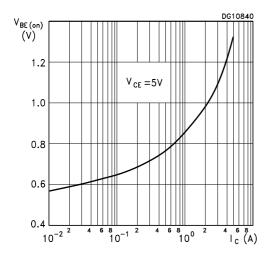

# **TO-220F MECHANICAL DATA**

| DIM. | mm    |       | inch  |       |       |       |
|------|-------|-------|-------|-------|-------|-------|
|      | MIN.  | TYP.  | MAX.  | MIN.  | TYP.  | MAX.  |
| А    | 4.50  |       | 4.90  | 0.177 |       | 0.193 |
| В    | 2.34  |       | 2.74  | 0.092 |       | 0.108 |
| D    | 2.56  |       | 2.96  | 0.101 |       | 0.117 |
| Е    | 0.45  | 0.50  | 0.60  | 0.018 | 0.020 | 0.024 |
| F    | 0.70  |       | 0.90  | 0.028 |       | 0.035 |
| F1   |       |       | 1.47  |       |       | 0.058 |
| G    |       | 5.08  |       |       | 0.200 |       |
| G1   | 2.34  | 2.54  | 2.74  | 0.092 | 0.100 | 0.108 |
| Н    | 9.96  |       | 10.36 | 0.392 |       | 0.408 |
| L2   |       | 15.80 |       |       | 0.622 |       |
| L4   | 9.45  |       | 10.05 | 0.372 |       | 0.396 |
| L6   | 15.67 |       | 16.07 | 0.617 |       | 0.633 |
| L7   | 8.99  |       | 9.39  | 0.354 |       | 0.370 |
| L8   |       | 3.30  |       |       | 0.130 |       |
| Dia  | 3.08  |       | 3.28  | 0.121 |       | 0.129 |

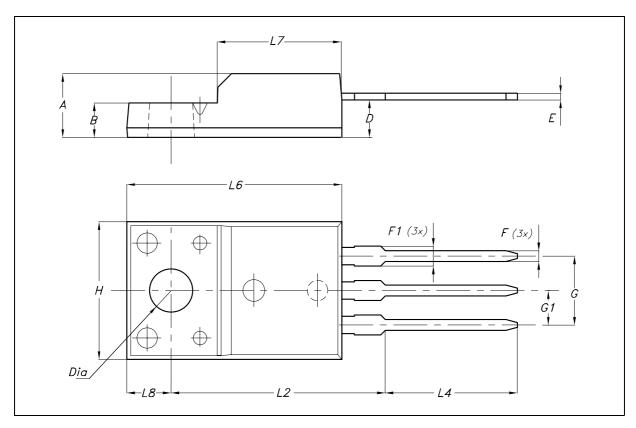

4/5

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a trademark of STMicroelectronics.

All other names are the property of their respective owners.

© 2003 STMicroelectronics – All Rights reserved STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

http://www.st.com

