## LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



#### **Features**


- · Extremely low RMS phase jitter (random)
  - <1 ps (typical)</p>
- · Wide frequency range
  - 1 MHz to 220 MHz
  - 220 MHz to 800 MHz refer to SiT9107
- · High frequency stability
  - ±10 PPM, ±15 PPM, ±20 PPM
  - ±25 PPM, ±50 PPM
- · Operating voltage
  - 1.8, 2.5 or 3.3 V
  - Other voltages up to 3.63 V (contact SiTime)
- · Operating temperature range
  - Industrial, -40 to 85 °C
  - Extended Commercial, -20 to 70 °C
  - Commercial, 0 to 70 °C
- · Small footprint
  - 5.0 x 3.2 x 0.75 mm
  - 7.0 x 5.0 x 0.90 mm
- · Pb-free and RoHS compliant
- For Spread Spectrum see SiT9002
- · Ultra-reliable start up and greater immunity from inter ference

#### **Benefits**

- · Ultra fast lead time: 2 to 3 weeks
- · No crystal or capacitors required
- · Eliminates crystal qualification time
- 50% + board saving space
- · More cost effective than quartz oscillators, quartz crystals and clock ICs.
- · Completely quartz-free

#### **Applications**

- Server
- Router
- · RAID controller
- · Gigabit Ethernet
- · 10 Gigabit Ethernet
- · Fiber Channel
- · SATA / SAS
- PCI-Express
- · Fully Buffered DIMM
- · System clock
- · Networking and computing

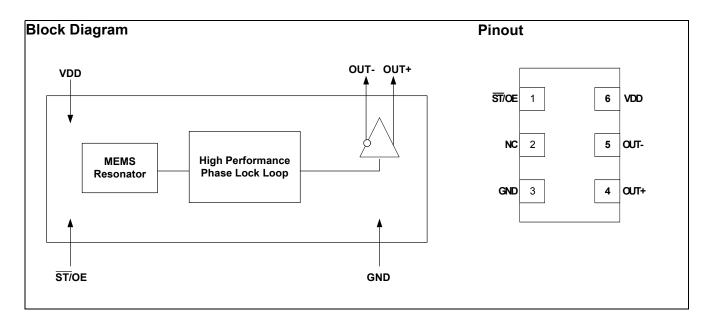

SiTime Corporation 990 Almanor Avenue Sunnyvale, CA 94085 www.sitime.com Rev. 1.52 Revised June 23, 2010

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



#### **Pin Description**

Pin No.	Name		Pin Description
1	ST/OE	Input	Standby or Output Enable pin for OUT+ and OUT  OE: When High or Open: OUT+ and OUT- = active When Low: OUT+ and OUT- = High Impedance state  ST: When High or Open: OUT+ and OUT- = active When Low: OUT+ and OUT- = Output is low (weak pull down), oscillation stops
2	NC	NA	Do Not connect pin, leave it floating.
3	GND	Power	VDD power supply ground. Connect to Ground
4	OUT+	Output	1 to 220 MHz programmable clock output .
5	OUT-	Output	
6	VDD	Power	Power supply

### **Absolute Maximum Ratings**

Attempted operation outside the absolute maximum ratings of the part may cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

#### **Absolute Maximum Table**

Parameter	Min.	Max.	Unit
Storage Temperature	-65	150	°C
VDD	-0.5	4	V
Vin	GND - 0.5	VDD + 0.5	V
Theta JA ( with copper plane on VDD and GND) 5.0 x 3.2 package	-	68	°C/W
7.0 x 5.0 package when center pad is soldered down 7.0 x 5.0 package when center pad is not soldered down	_	38	°C/W
7.0 x 3.0 package which center page is not soldered down	_	90	°C/W
Theta JC (with PCB traces of 0.010 inch to all pins) 5.0 x 3.2 package	-	45	°C/W
7.0 x 5.0 package when center pad is soldered down 7.0 x 5.0 package when center pad is not soldered down	_	35	°C/W
7.0 x 3.0 package which center page is not soldered down	_	48	°C/W
Soldering Temperature (follow standard Pb free soldering guidelines)	_	260	°C
Number of Program Writes	_	1	NA
Program Retention over -40 to 125C, Process, VDD (0 to 3.6V)	_	1,000+	years
Human Body Model (JESD22-A114)	2000	-	_
Charged Device Model (JESD22-C101)	750	-	_
Machine Model (JESD22-A115)	200	_	_

### **Environmental Compliance**

Parameter	Condition/Test Method
Mechanical Shock	MIL-STD-883F, Method 2002
Mechanical Vibration	MIL-STD-883F, Method 2007
Temperature Cycle	MIL-STD-883F, Method 1010-65-150°C (1000 cycle)
Solderability	MIL-STD-883F, Method 2003
Moisture Sensitivity Level	MSL1 @ 260°C

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



## **DC Electrical Specifications**

LVCMOS input, OE or ST pin, 3.3V ±10% or 2.5V ±10% or 1.8V ±5%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
V <sub>IH</sub>	Input High Voltage		70	-	_	%Vdd
V <sub>IL</sub>	Input Low Voltage		_	_	30	%Vdd
I <sub>IH</sub>	Input High Current	OE or ST pin	_	_	10	μΑ
I <sub>IL</sub>	Input Low Current	OE or ST pin	-10	_	_	μΑ
T <sub>pu</sub>	Power Up Time	Time from minimum power supply voltage to the first cycle (Guaranteed no runt pulses)	-	_	10	ms

#### LVPECL, 3.3V ±10% or 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
$I_{DD}$	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	68	74	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	_	65	71	mA
V <sub>OH</sub>	Output High Voltage	50 Ohm termination to V <sub>DD</sub> - 2.0V	V <sub>DD</sub> -1.1	-	V <sub>DD</sub> -0.7	V
V <sub>OL</sub>	Output Low Voltage	See Figure 2, 3.	V <sub>DD</sub> -2.0	_	V <sub>DD</sub> -1.4	V
V <sub>swing</sub>	Pk-Pk Output Voltage Swing		600	800	1000	mV

#### HCSL, 3.3V ±10% or 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
$I_{DD}$	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	65	70	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	_	62	67	mA
V <sub>OH</sub>	Output High Voltage	50 Ohm termination to GND	600	_	950	mV
V <sub>OL</sub>	Output Low Voltage	See Figure 4.	0.0	_	50	mV
V <sub>swing</sub>	Pk-Pk Output Voltage Swing		600	_	950	mV

#### LVDS, 3.3V ±10% or 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage		2.97	3.3	3.63	V
			2.25	2.5	2.75	V
I <sub>DD</sub>	Supply Current	V <sub>DD</sub> = 3.3, Excluding Load Termination Current	_	73	79	mA
		V <sub>DD</sub> = 2.5, Excluding Load Termination Current	_	70	76	mA
V <sub>OD1</sub>	Differential Output Voltage	Swing Mode = Normal	250	350	450	mV
$\Delta V_{\text{OD1}}$	V <sub>OD</sub> Magnitude Change	Single load termination. See Figure 5.	_	-	50	mV
V <sub>OS1</sub>	Offset Voltage	gare o.	_	1.2	-	V
$\Delta V_{OS1}$	V <sub>OS</sub> Magnitude Change		-	-	50	mV
$V_{OD2}$	Differential Output Voltage	Swing Mode = High	500	700	900	mV
$\Delta V_{OD2}$	V <sub>OD</sub> Magnitude Change	Single load termination. See Figure 5.	_	-	50	mV
V <sub>OS2</sub>	Offset Voltage	gure 3.	_	1.2	-	V
$\Delta V_{OS2}$	V <sub>OS</sub> Magnitude Change		_	_	50	mV
$V_{OD3}$	Differential Output Voltage	Swing Mode = High	250	350	450	mV
$\Delta V_{\text{OD3}}$	V <sub>OD</sub> Magnitude Change	Double load termination. See Figure 6.	_	_	50	mV
V <sub>OS3</sub>	Offset Voltage		_	1.2	_	V
$\Delta V_{OS3}$	V <sub>OS</sub> Magnitude Change		_	-	50	mV

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



CML,  $3.3V \pm 10\%$  or  $2.5V \pm 10\%$  or  $1.8V \pm 5\%$ , -40 to  $85^{\circ}C$ 

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
$V_{DD}$	Supply Voltage			2.97	3.3	3.63	V
				2.25	2.5	2.75	V
				1.71	1.8	1.89	V
$I_{DD}$	Supply Current	V <sub>DD</sub> = 3.3V	Excluding Load	_	48	51	mA
		V <sub>DD</sub> = 2.5V	Current	_	47	50	mA
		V <sub>DD</sub> = 1.8V	_	38	41	mA	
V <sub>OH1</sub>	Output High Voltage	Swing Mode = Normal		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
V <sub>OL1</sub>	Output Low Voltage	Single Load Termination See Figure 7.		V <sub>DD</sub> -0.55	V <sub>DD</sub> -0.425	V <sub>DD</sub> -0.3	V
V <sub>swing1</sub>	Pk-Pk Output Voltage Swing	occ riguio r.		300	425	550	mV
$V_{OH2}$	Output High Voltage	Swing Mode = High		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
$V_{OL2}$	Output Low Voltage	Single Load Termination See Figure 7.		V <sub>DD</sub> -1.1	V <sub>DD</sub> -0.85	V <sub>DD</sub> -0.6	V
V <sub>swing2</sub>	Pk-Pk Output Voltage Swing	occ riguio r.		600	850	1100	mV
V <sub>OH3</sub>	Output High Voltage	Swing Mode = High		V <sub>DD</sub> -0.1	_	$V_{DD}$	V
$V_{OL3}$	Output Low Voltage	ouble Load Termination ee Figure 8.		V <sub>DD</sub> -0.55	V <sub>DD</sub> -0.425	V <sub>DD</sub> -0.3	V
V <sub>swing3</sub>	Pk-Pk Output Voltage Swing			300	425	550	mV

## **AC Electrical Specifications**

LVPECL, 3.3V ±10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
		operating temp., rated power supply voltage change, load	-20 to 70°C	-15	_	+15	PPM
		change	-40 to 85°C	-20	_	+20	PPM
				-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C	•	_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		100	150	300	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 637	kHz to10 MHz	_	1.6	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.875 to 20 MHz		_	0.5	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20	MHz	_	0.7	_	ps
PJ	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz	F <sub>out</sub> = 106.25 MHz		1.8	2.3	ps
		F <sub>out</sub> = 156.25 MHz		-	1.3	1.8	ps
		F <sub>out</sub> = 200 MHz		-	1.3	1.8	ps

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



### LVPECL, 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
		operating temp., rated power supply voltage	-20 to 70°C	-15	_	+15	PPM
		change, load change	-40 to 85°C	-20	_	+20	PPM
				-25		+25	PPM
	First year @ 25°C		-50		+50	PPM	
F <sub>age</sub>	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	_	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		100	150	300	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 6	37 kHz to10 MHz	_	1.6	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1	.875 to 20 MHz	_	0.5	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to	20 MHz	_	0.7	_	ps
P <sub>J</sub>	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	1.8	2.3	ps
		F <sub>out</sub> = 156.25 MHz		_	1.3	1.8	ps
		F <sub>out</sub> = 200 MHz		_	1.3	1.8	ps

### HCSL, 3.3V ±10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	-	220	MHz
stab i i i i i	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
	operating temp., rated power	-20 to 70°C	-15	-	+15	PPM	
		change	-40 to 85°C	-20	_	+20	PPM
			-25		+25	PPM	
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C	·	_	_	1	PPM
DC	Duty Cycle			45	_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%		200	280	375	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 100 MHz @ BW: 1.5 MH	Hz to 22 MHz	-	0.8	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1.5 MHz to 22 MHz		_	0.4	_	ps
PJ	RMS Period Jitter	F <sub>out</sub> = 100 MHz		-	1.6	2.2	ps
		F <sub>out</sub> = 200 MHz		_	1.5	1.9	ps

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



### HCSL, 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
		operating temp., rated power supply voltage	-20 to 70°C	-15	-	+15	PPM
		change, load change	-40 to 85°C	-20	_	+20	PPM
			-25		+25	PPM	
			-50		+50	PPM	
F <sub>age</sub>	Aging	First year @ 25°C		_	-	1	PPM
DC	Duty Cycle			45	_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%		200	300	400	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 100 MHz @ BW: 1.5 M	MHz to 22 MHz	_	0.8	-	ps
		F <sub>out</sub> = 200 MHz @ BW: 1.5 M	MHz to 22 MHz	_	0.4	_	ps
$P_{J}$	RMS Period Jitter	F <sub>out</sub> = 100 MHz		_	1.6	2.2	ps
		F <sub>out</sub> = 200 MHz		_	1.5	2.1	ps

### LVDS, 3.3V ±10%, -40 to 85°C

Symbol	Parameter	Condition	n	Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			10	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	-	+10	PPM
		operating temp., rated power supply voltage	-20 to 70°C	-15	_	+15	PPM
		change, load change	-40 to 85°C	-20	_	+20	PPM
				-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C			-	1	PPM
DC	Duty Cycle			45	-	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		100	200	325	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 6	637 kHz to10 MHz	_	1.7	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.875 to 20 MHz		_	0.7	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20 MHz		_	0.7	_	ps
PJ	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	2.0	2.7	ps
		F <sub>out</sub> = 156.25 MHz		_	1.8	2.5	ps
		F <sub>out</sub> = 200 MHz		_	1.8	2.5	ps

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



### LVDS, 2.5V ±10%, -40 to 85°C

Symbol	Parameter	Conditio	n	Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	-	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
		operating temp., rated power supply voltage	-20 to 70°C	-15	_	+15	PPM
		change, load change	-40 to 85°C	-20	-	+20	PPM
				-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%		100	260	325	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 0	637 kHz to10 MHz	_	1.7	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.875 to 20 MHz		_	0.7	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20 MHz		_	0.7	_	ps
PJ	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	2.5	3.3	ps
		F <sub>out</sub> = 156.25 MHz		_	2.4	3.5	ps
		F <sub>out</sub> = 200 MHz		-	2.4	3.5	ps

### CML, 3.3V ±10%, -40 to 85°C

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power supply voltage change, load change	0 to 70°C	-10	_	+10	PPM
			-20 to 70°C -40 to 85°C	-15	_	+15	PPM
				-20	_	+20	PPM
				-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%		150	220	300	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 637 kHz to10 MHz		_	1.6	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.875 to 20 MHz		_	0.6	-	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20 MHz		_	0.8	_	ps
PJ	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	2	2.5	ps
		F <sub>out</sub> = 156.25 MHz		_	1.9	2.5	ps
		F <sub>out</sub> = 200 MHz		_	1.9	2.4	ps

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



### CML, $2.5V \pm 10\%$ , -40 to $85^{\circ}C$

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability,	0 to 70°C	-10	_	+10	PPM
		operating temp., rated power supply voltage	-20 to 70°C	-15	_	+15	PPM
		change, load change	-40 to 85°C	-20	-	+20	PPM
				-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	-	55	%
t <sub>R</sub> /t <sub>F</sub>	Output Rise/Fall Time	20% to 80%		150	230	300	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 6	37 kHz to10 MHz	_	1.6	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.875 to 20 MHz		_	0.6	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20 MHz		_	0.8	_	ps
P <sub>J</sub>	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	2.1	2.5	ps
		F <sub>out</sub> = 156.25 MHz			1.9	2.5	ps
		F <sub>out</sub> = 200 MHz		-	1.9	2.5	ps

## CML, $1.8V \pm 5\%$ , -40 to $85^{\circ}C$

Symbol	Parameter	Condition		Min.	Тур.	Max.	Unit
F <sub>out</sub>	Output Frequency			1.0	_	220	MHz
F <sub>stab</sub>	Frequency Stability	Inclusive of initial stability, operating temp., rated power supply voltage change, load change	0 to 70°C	-15	_	+15	PPM
			-20 to 70°C	-20	_	+20	PPM
			-40 to 85°C	-25		+25	PPM
				-50		+50	PPM
F <sub>age</sub>	Aging	First year @ 25°C		_	_	1	PPM
DC	Duty Cycle			45	_	55	%
$t_R/t_F$	Output Rise/Fall Time	20% to 80%		150	240	325	ps
$PH_J$	RMS Phase Jitter (random)	F <sub>out</sub> = 106.25 MHz @ BW: 637 kHz to10 MHz		_	1.7	_	ps
		F <sub>out</sub> = 156.25 MHz @ BW: 1.87 to 20 MHz		_	0.6	_	ps
		F <sub>out</sub> = 200 MHz @ BW: 1 to 20 MHz		_	0.8	_	ps
$P_{J}$	RMS Period Jitter	F <sub>out</sub> = 106.25 MHz		_	2.3	2.9	ps
		F <sub>out</sub> = 156.25 MHz		_	2.1	2.7	ps
		F <sub>out</sub> = 200 MHz		ı	2.1	2.7	ps



### **Termination Diagrams**

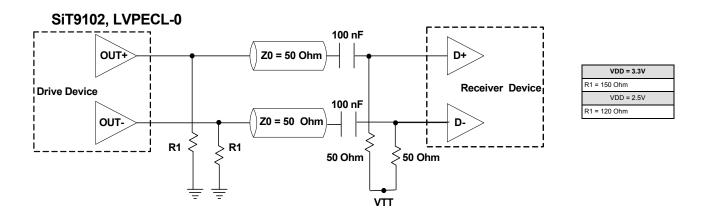


Figure 1. LVPECL AC Coupled Typical Termination

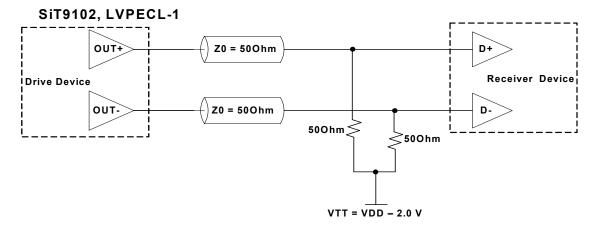


Figure 2. LVPECL DC Coupled Typical Termination with Termination Voltage

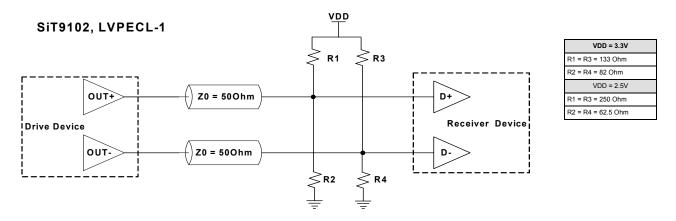


Figure 3. LVPECL DC Coupled Typical Termination without Termination Voltage



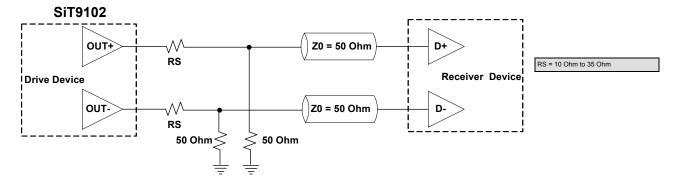


Figure 4. HCSL Typical Termination

#### Note:

1. All the tests are done with RS = 20 Ohm (recommended).


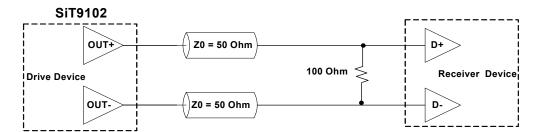


Figure 5. LVDS Single Termination (Load Terminated)

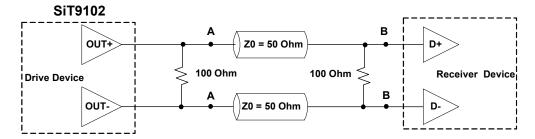

Note: For AC coupled operation, include/insert decoupling caps at points  ${\bf A}$  or  ${\bf B}$ 

Figure 6. LVDS Double Termination (Source + Load Terminated)




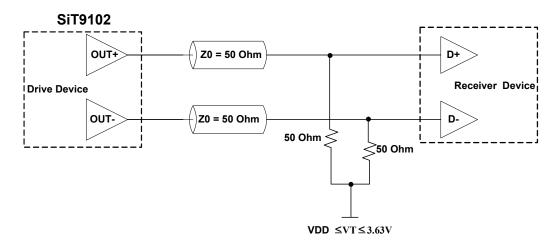


Figure 7. CML Single Load Termination

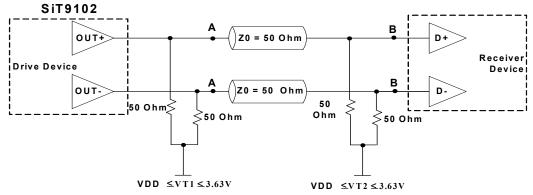

#### Notes:

- 1. For DC-coupled operation, VT1 = VT2
  2. For AC coupled operation, include/insert decoupling caps at points A or B
  2. For AC-coupled operation with capacitors placed at point A, VT2 sets the input common mode of Receiver Device and need not to be related to VT1


Figure 8. CML Double Load Termination

# LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator



### **Ordering Information**

The Part No. Guide is for reference only. For real-time customization and exact part number, use the SiTime Part Number Generator.

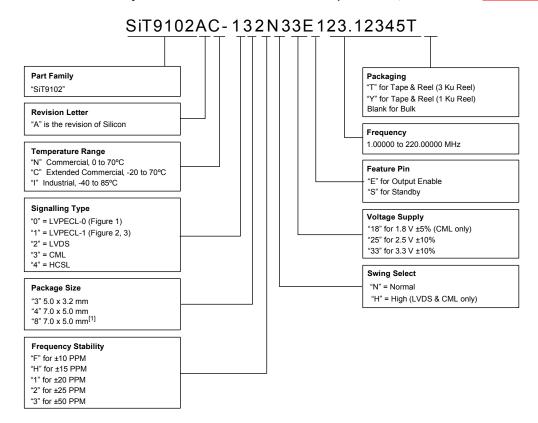

# Frequency Stability vs. Temperature Range Options

Frequency	Temperature	Supply Voltage				
Stability (PPM)	Range	1.8 V	2.5 V	3.3 V		
	N (0 to +70°C)	_	✓	✓		
±10	C (-20 to +70°C)	_	-	-		
	I (-40 to +85°C)	-	-	-		
	N (0 to +70°C)	✓	✓	✓		
±15	C (-20 to +70°C)	-	✓	✓		
	I (-40 to +85°C)	-	✓	✓		
	N (0 to +70°C)	✓	✓	✓		
±20	C (-20 to +70°C)	✓	✓	✓		
	I (-40 to +85°C)	✓	✓	✓		
	N (0 to +70°C)	✓	✓	✓		
±25	C (-20 to +70°C)	✓	✓	✓		
	I (-40 to +85°C)	✓	✓	✓		
	N (0 to +70°C)	✓	✓	✓		
±50	C (-20 to +70°C)	✓	✓	✓		
	I (-40 to +85°C)	✓	✓	✓		

## Signaling Type vs. Swing Select Options

Signaling		Supply Voltage				
Туре	Swing Select	1.8 V	2.5 V	3.3 V		
LVPECL-0	Normal	_	✓	✓		
LVPECL-0	High	_	ı	-		
LVPECL-1	Normal	-	<b>✓</b>	✓		
LVPECL-1	High	-	-	_		
LVDC	Normal	-	✓	✓		
LVDS	High	-	<b>✓</b>	✓		
CMI	Normal	✓	✓	✓		
CML	High	✓	✓	✓		
11001	Normal	_	✓	✓		
HCSL	High	-	1	_		

#### Note:

1. Without Center Pad.

## LVPECL / HCSL / LVDS / CML 1 to 220 MHz High Performance Oscillator





#### Package Information [2]

Dimension (mm)


Land Pattern<sup>[3]</sup> (recommended) (mm)


#### 5.0 x 3.2 x 0.75mm

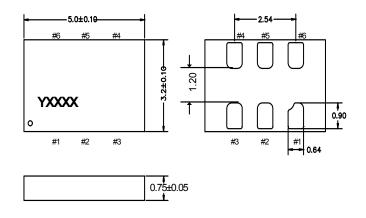



#### 7.0 x 5.0 x 0.90mm

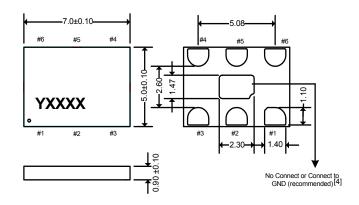



#### Notes:

- "Y" denotes manufacturing origin and "XXXX" denotes manufacturing lot number. The value of "Y" depend on the assembly location of the device.
   A capacitor of value 0.1μF between VDD and GND is recommended.
- 4. The 7050 package with part number designation "-8" has NO center pad.

© SiTime Corporation 2010. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress

Disclaimer: SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any sitime product and any product documentation. products sold by sitme are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. all sales are made conditioned upon compliance with the critical uses policy set forth below.

#### CRITICAL USE EXCLUSION POLICY

BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.