


Ultrafast Recovery Modules

UFT200, 201 & 202

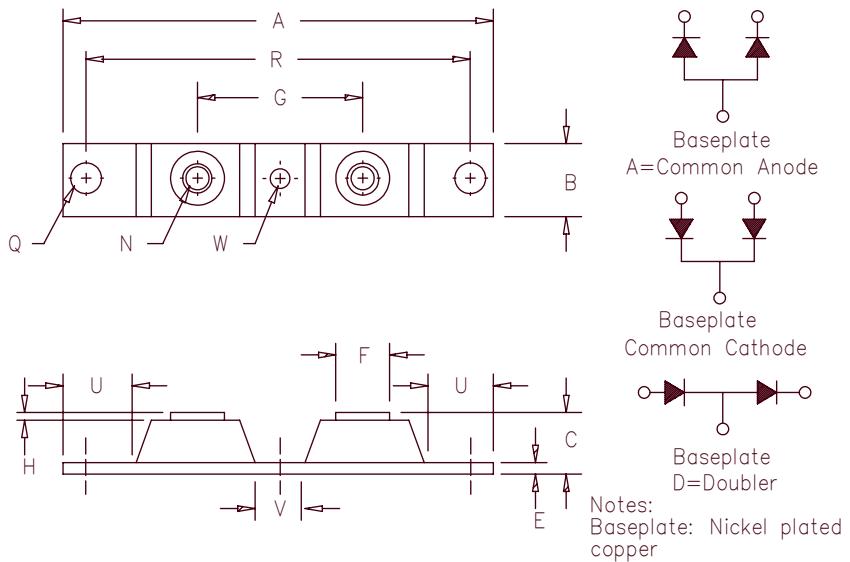

Dim.		Inches	Millimeters		
Min.	Max.		Min.	Max.	Notes
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375	BSC	34.92	BSC	
H	0.010	---	0.25	---	
N	---	---	---	---	1/4-20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150	BSC	80.01	BSC	
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Working Reverse Voltage	Peak Reverse Voltage	Repetitive Peak Reverse Voltage
UFT20005*	50V	50V	
UFT20010*	100V	100V	
UFT20015*	150V	150V	
UFT20020*	200V	200V	
UFT20120*	200V	200V	
UFT20130*	300V	300V	
UFT20140*	400V	400V	
UFT20150*	500V	500V	
UFT20260*	600V	600V	
UFT20270*	700V	700V	
UFT20280*	800V	800V	

Add Suffix A for Common Anode, D for Doubler

- Ultra Fast Recovery
- 175°C Junction Temperature
- V_{RRM} 50 to 800 Volts
- High surge capacity
- 2 X 100 Amp current rating
- ROHS Compliant

Electrical Characteristics

	UFT200	UFT201	UFT202	
Average forward current per pkg	$I_F(AV)$ 200A	200A	200A	Square Wave
Average forward current per leg	$I_F(AV)$ 100A	100A	100A	Square Wave
Case Temperature	T _C 135°C	120°C	115°C	$R_{\theta JC} = 0.5^{\circ}\text{C}/\text{W}$
Maximum surge current per leg	I_{FSM} 1500A	1400A	1200A	8.3ms, half sine, $T_J = 175^{\circ}\text{C}$
Max peak forward voltage per leg	V_{FM} .975V	1.25V	1.35V	$ I_{FM} = 100A; T_J = 25^{\circ}\text{C}^*$
Max reverse recovery time per leg	t_{rr} 50ns	70ns	90ns	1/2A, 1A, 1/4A, $T_J = 25^{\circ}\text{C}$
Max peak reverse current per leg	I_{RM} _____	6.0mA	_____	$\bar{V}_{RRM}, T_J = 125^{\circ}\text{C}$
Max peak reverse current per leg	I_{RM} _____	50μA	_____	$\bar{V}_{RRM}, T_J = 25^{\circ}\text{C}$
Typical Junction capacitance	C _J 575pF	300pF	275pF	$V_R = 10V, T_J = 25^{\circ}\text{C}$

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 175°C
Operating junction temp range	T _J	-55°C to 175°C
Max thermal resistance per leg	R _{θJC}	0.5°C/W Junction to case
Max thermal resistance per pkg	R _{θJC}	0.25°C/W Junction to case
Typical thermal resistance	R _{θCS}	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting base torque – (outside holes)		30–40 inch pounds
Mounting base torque – (center hole)		8–10 inch pounds
center bolt must be torqued first		
Weight		2.8 ounces (75 grams) typical

UFT200

Figure 1
Typical Forward Characteristics – Per Leg

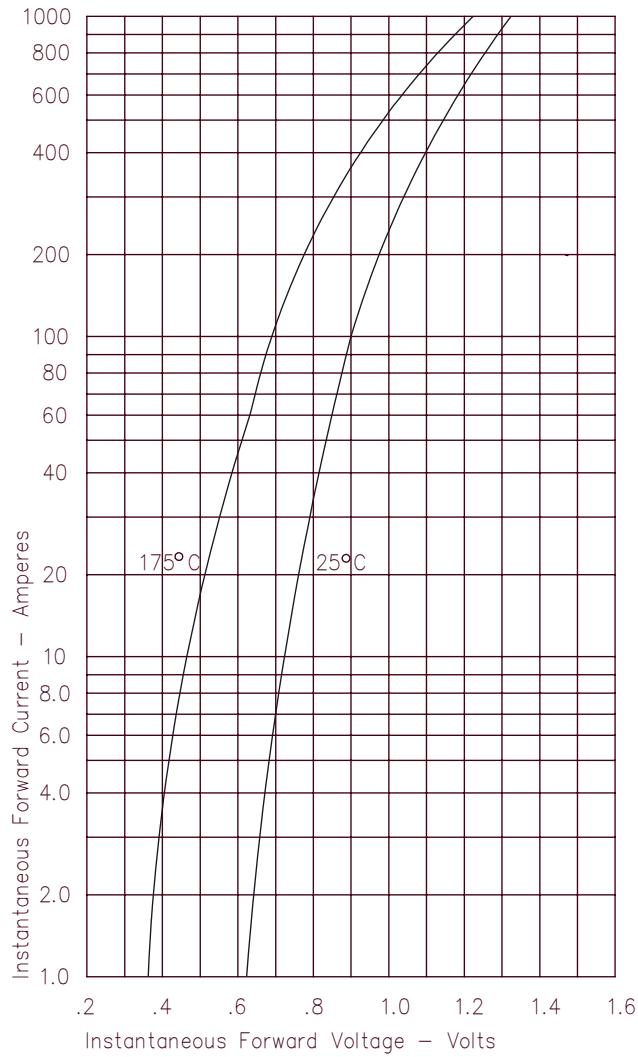


Figure 2
Typical Reverse Characteristics – Per Leg

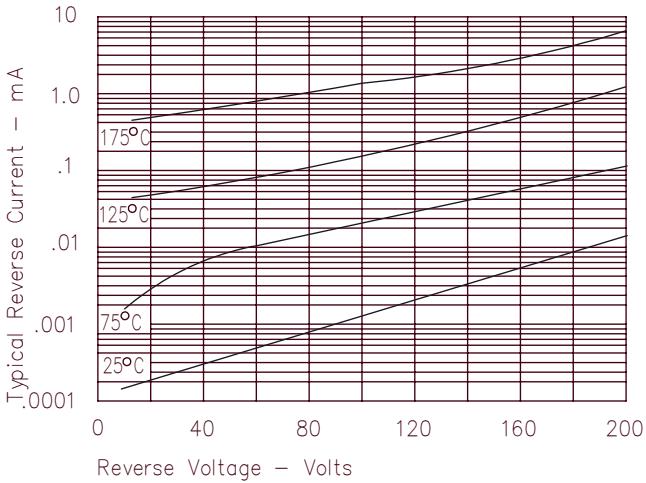


Figure 3
Typical Junction Capacitance – Per Leg

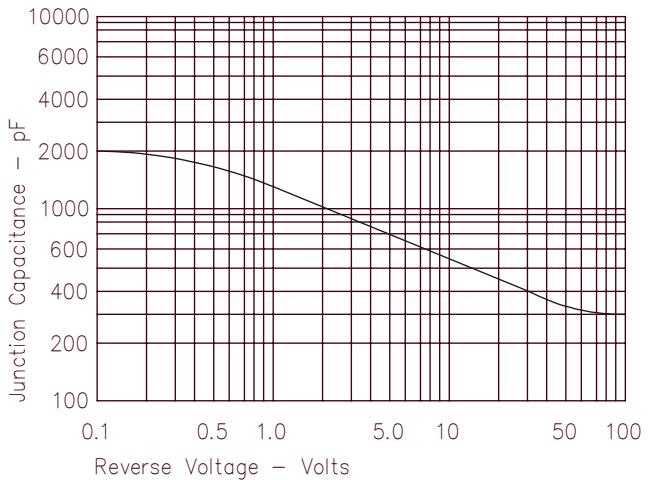


Figure 4
Forward Current Derating – Per Leg


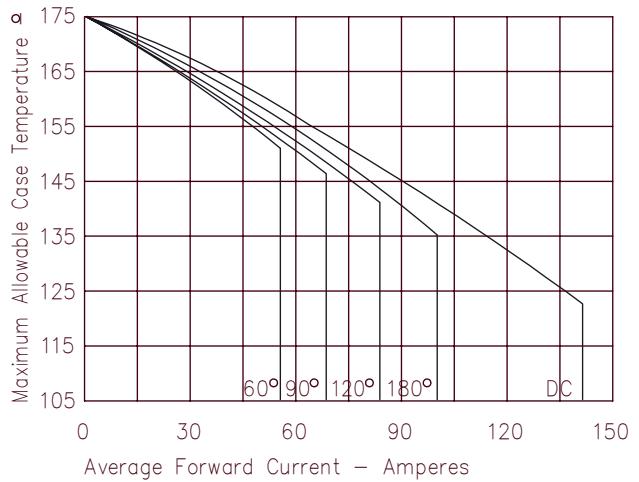


Figure 5
Maximum Forward Power Dissipation – Per Leg

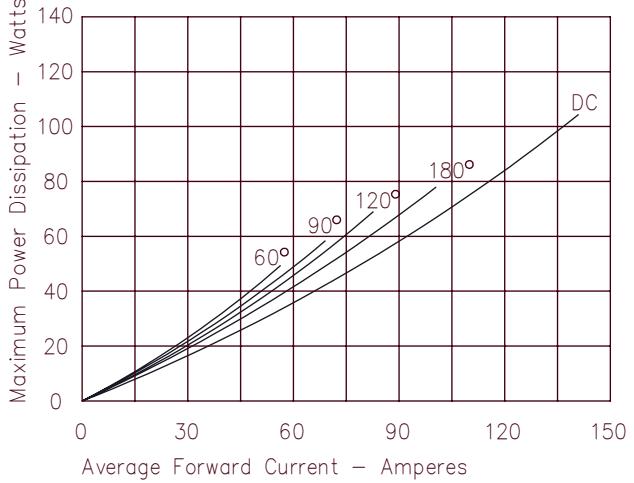

UFT201

Figure 1
Typical Forward Characteristics – Per Leg

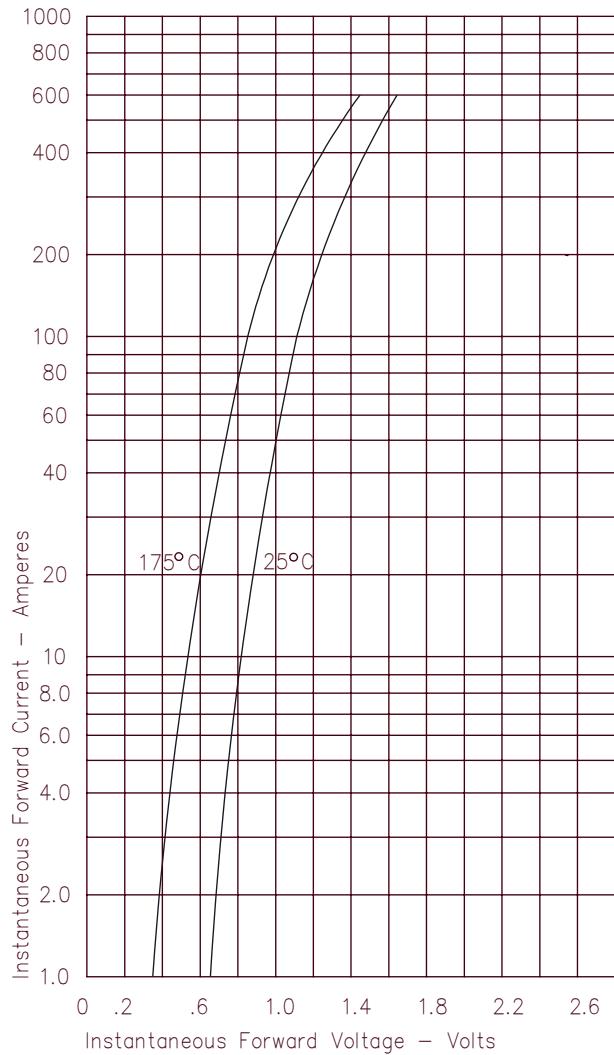


Figure 2
Typical Reverse Characteristics – Per Leg

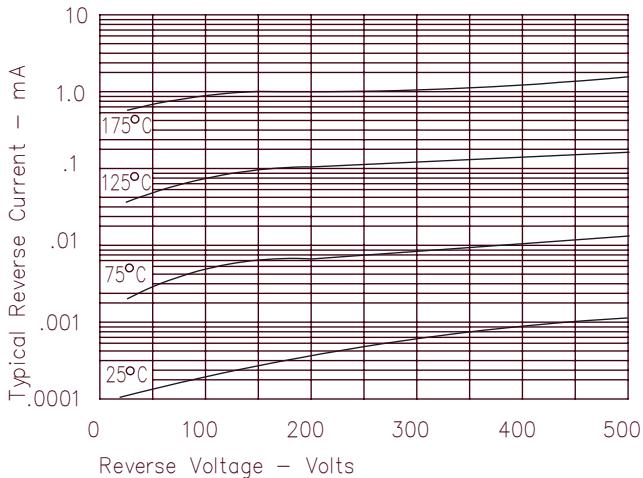


Figure 3
Typical Junction Capacitance – Per Leg

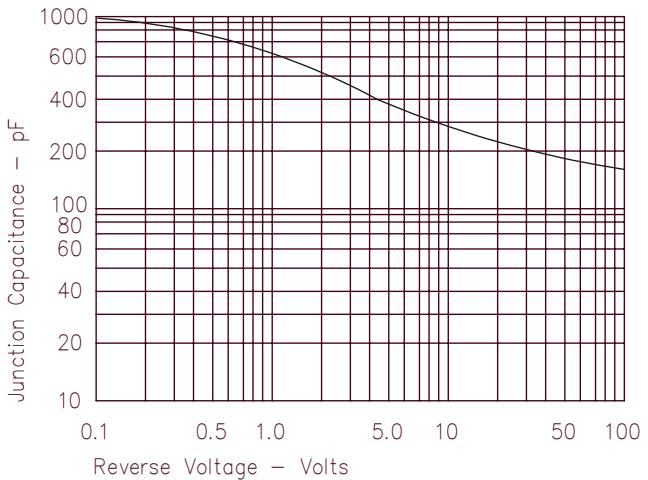


Figure 4
Forward Current Derating – Per Leg


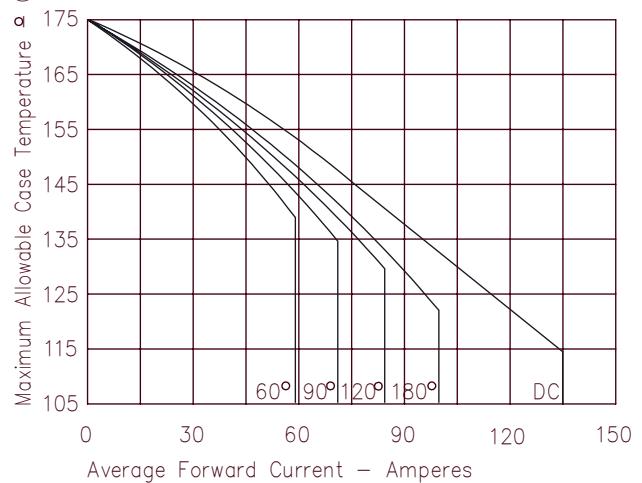


Figure 5
Maximum Forward Power Dissipation – Per Leg

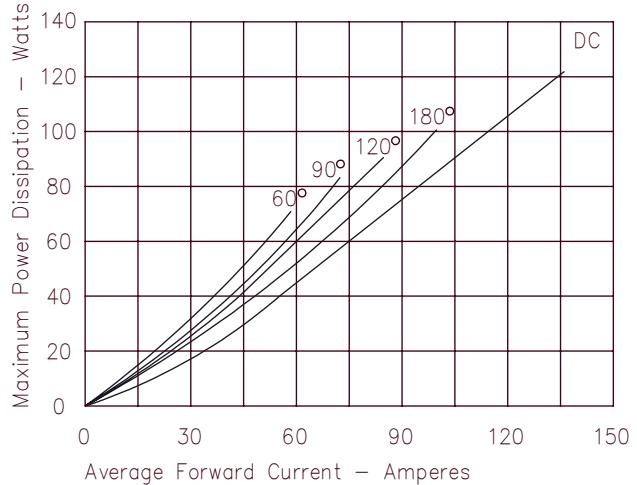

UFT202

Figure 1
Typical Forward Characteristics – Per Leg

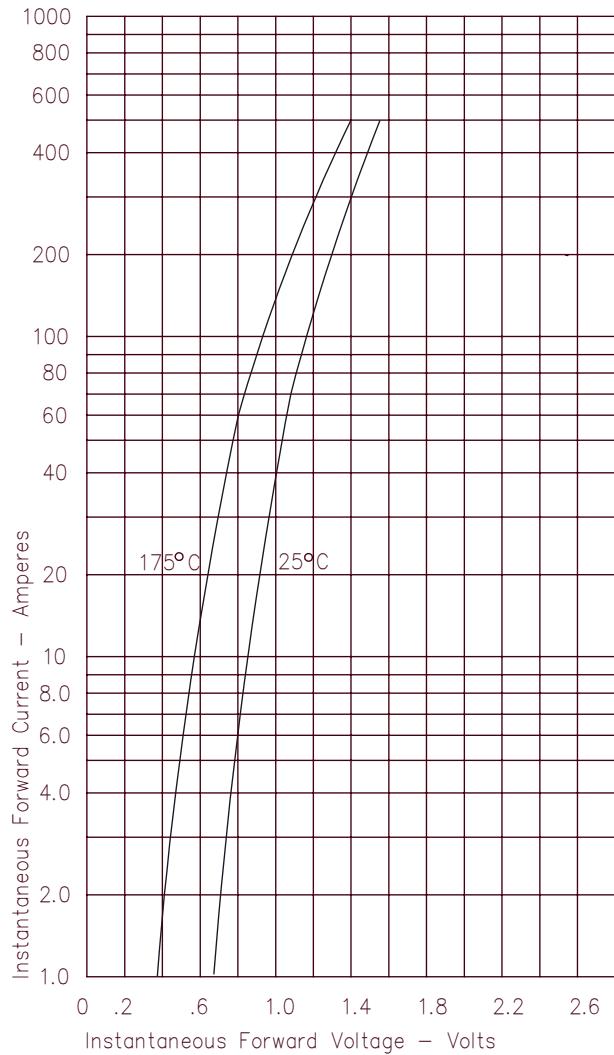


Figure 2
Typical Reverse Characteristics – Per Leg

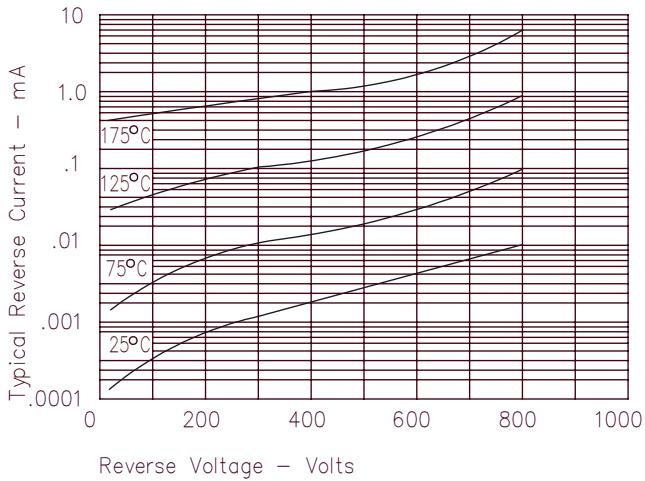


Figure 3
Typical Junction Capacitance – Per Leg

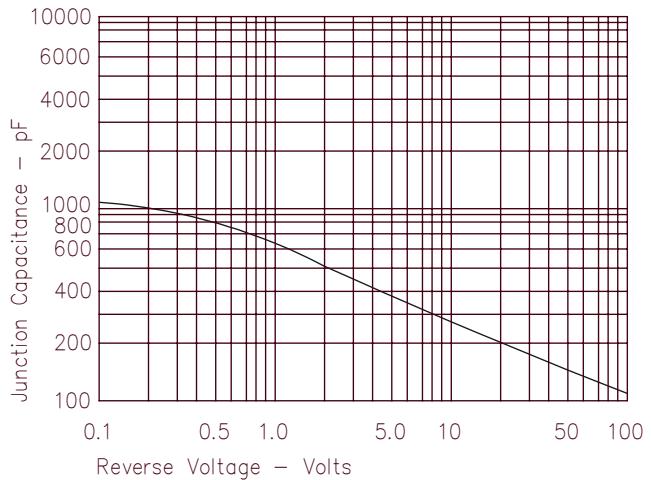


Figure 4
Forward Current Derating – Per Leg

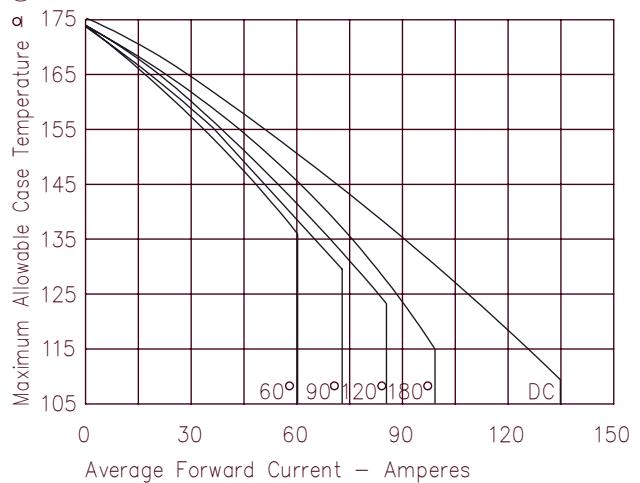


Figure 5
Maximum Forward Power Dissipation – Per Leg

